


NOD32 FAQ-> Remote Administrator

1. 如何輸入兩種更新設定？

How to enter two of update setting.


請選擇一個用戶，在客戶端下載最新的設定檔，滑鼠右鍵選擇設定，然後另存設定檔。

Please double click the user, right click the properties, and choose the configuration and downloaded the configuration file from the user then click “save as”

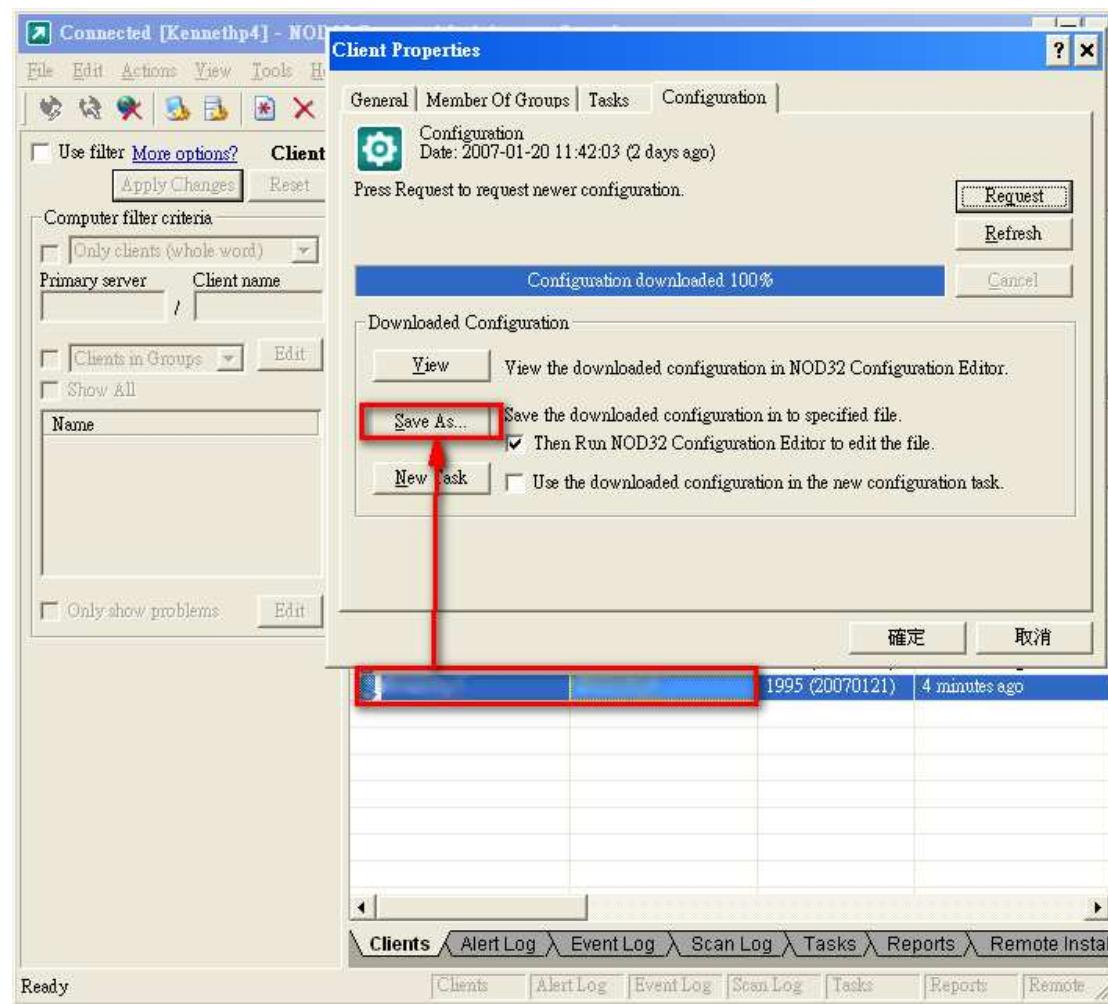


然後會自動彈出 NOD32 修改設定器

It will auto pop up NOD32 Configuration Editor.

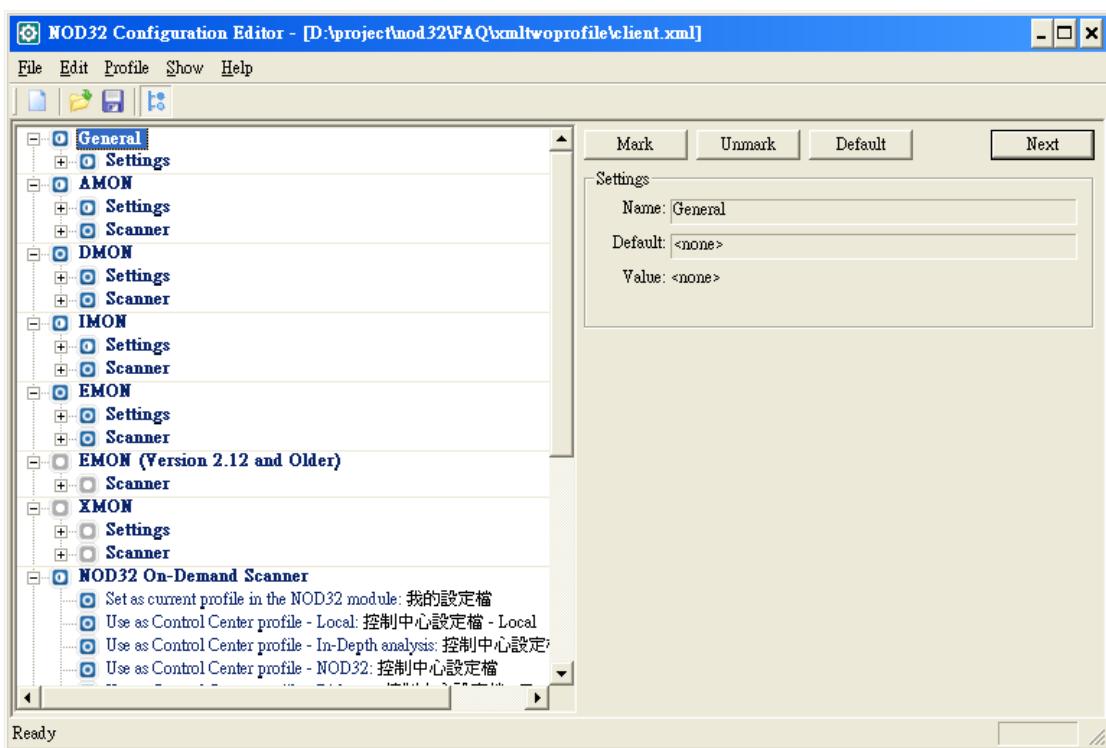


在更新內的子項目中選擇設定檔，滑鼠右鍵選擇新的設定檔

Click "update" and find profile in the sub directory, right click to choose "New Profile"

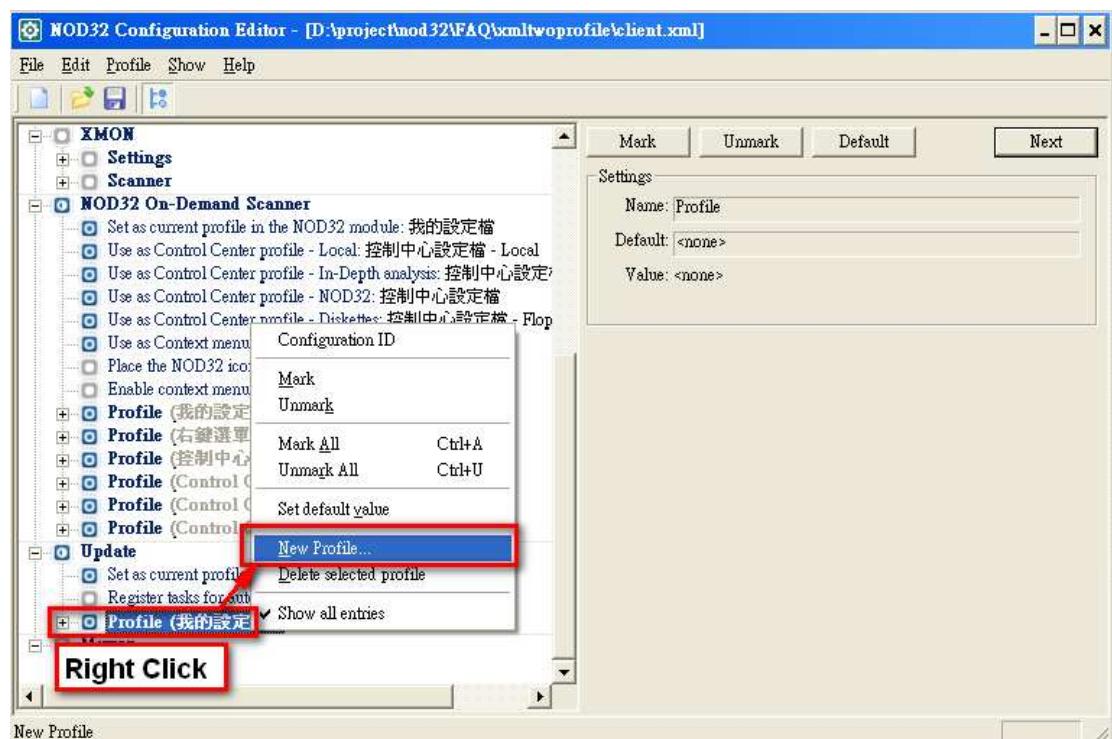


2. 選 "Update" 的同時鍵為 Internet


Please choose update and rename as Internet

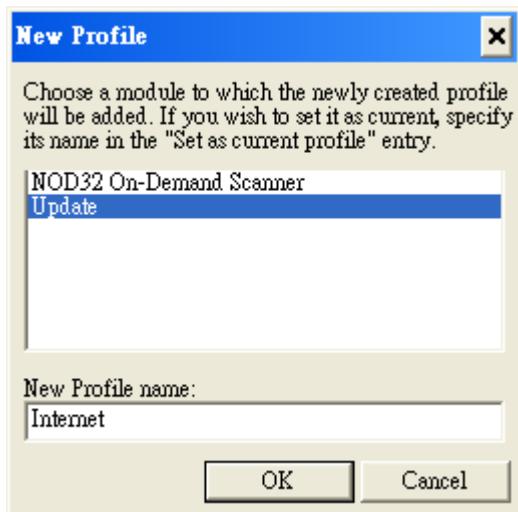

選擇一般中的 Internet 設定檔內的子項目中選擇**設定**, 然後輸入用戶名及密碼
 Choose the profile of Internet open the sub directory of **settings**, Enter the Username and Password.

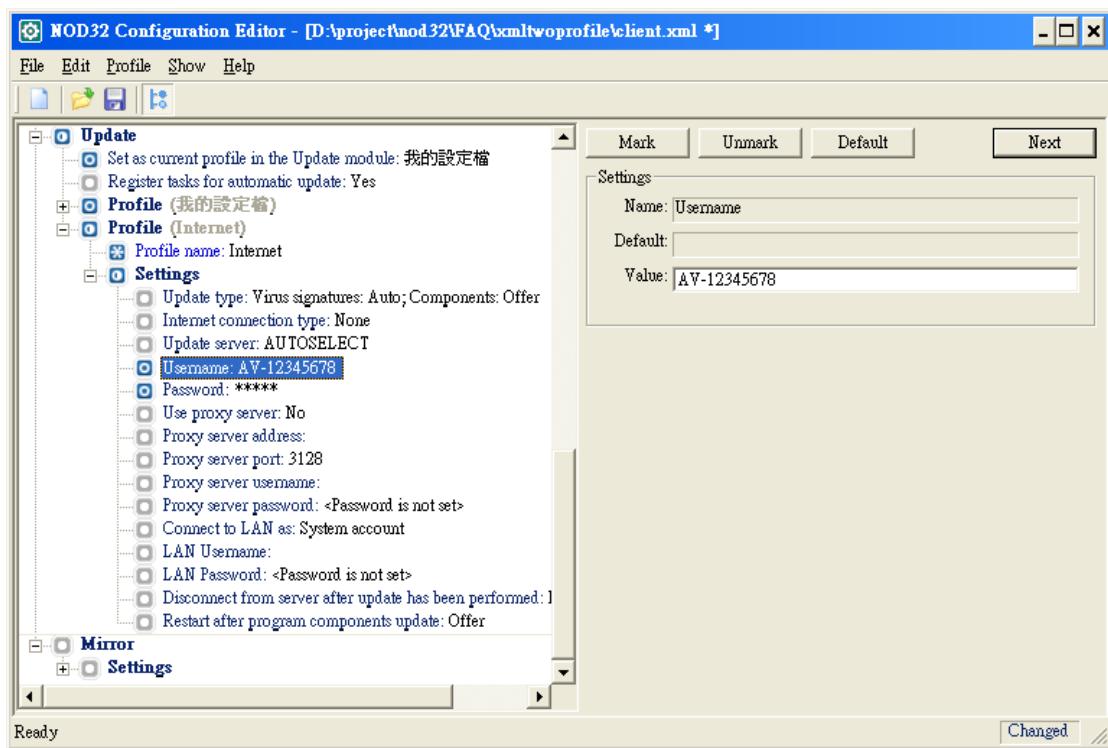


修改一般內的**設定**然後選擇**排程器**子項目中選擇**排程器/計劃器**.
 Modify scheduler/Planner from General ->Setting ->Scheduler->Scheduler/Planner.

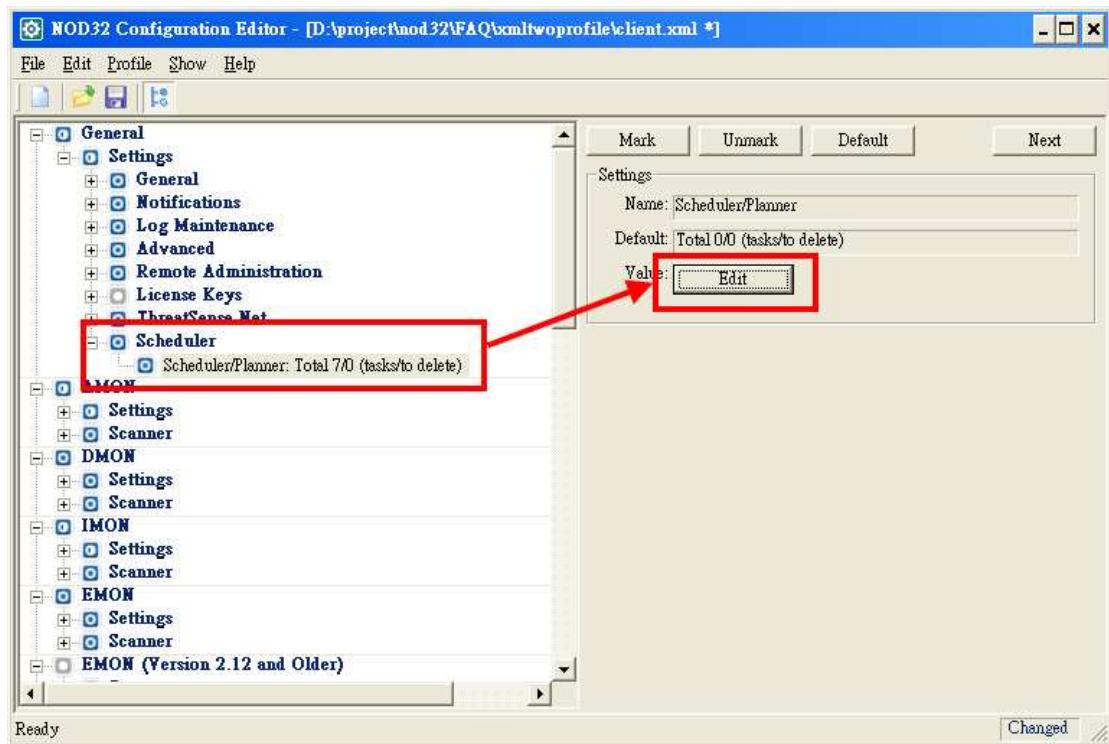


在定期自動更新內按修改，按下步至以下的設定版面。

In Regular automatic update, click edit, you will see the following screen.

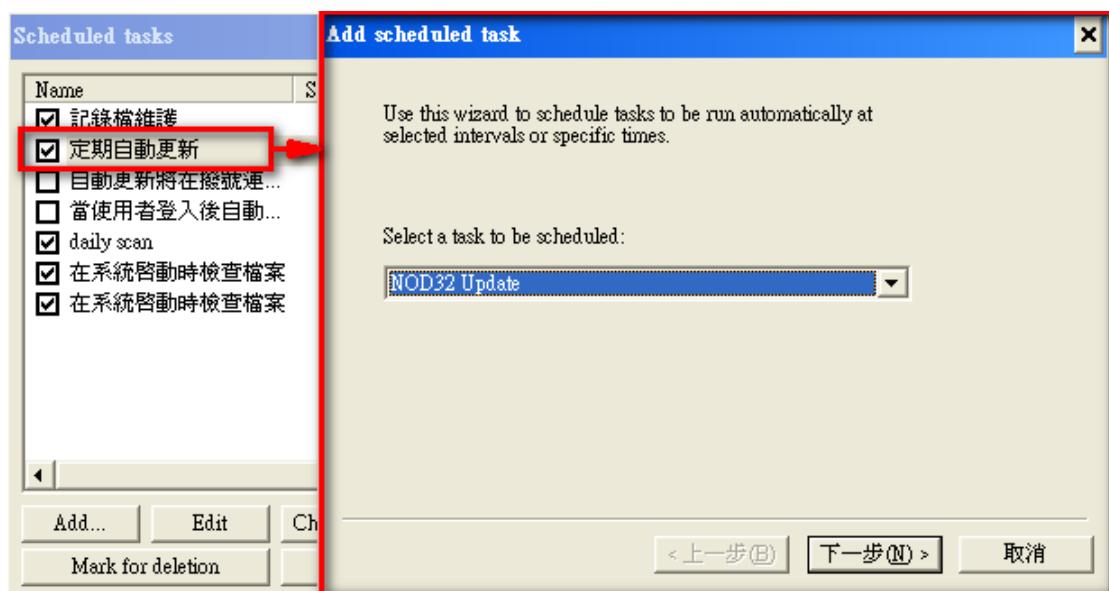

在主設定檔請設定為我的設定檔，可選擇的設定檔請選擇 Internet.

Primary profile please set my profile, alternative profile set internet.

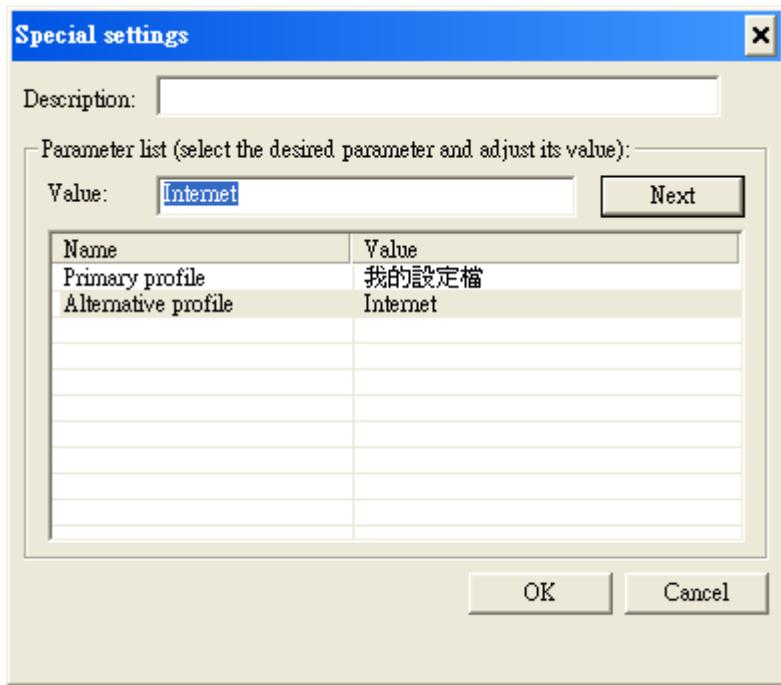

3. 在 Remote Admin Console 派送設定檔

In Remote Admin Console push the configuration task


新增 Task

Click “File” to choose a New Task




設定 Task

Setup the Task

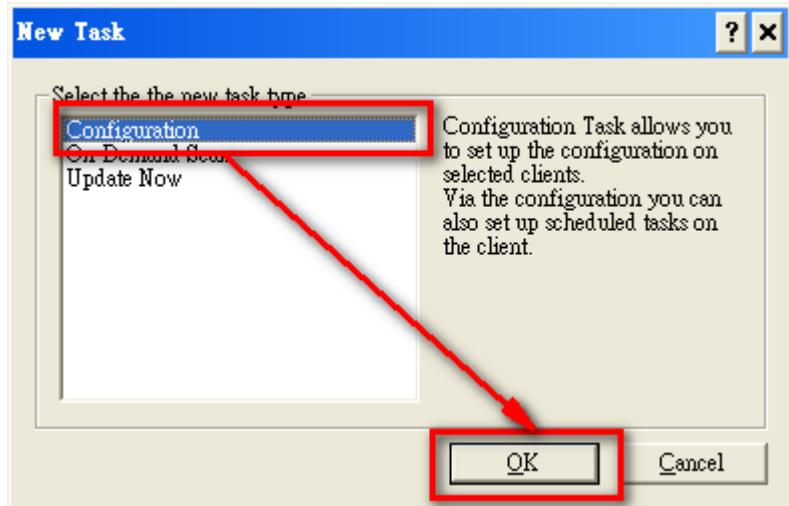


選擇之前設定好的 XML

please select the configuration of xml

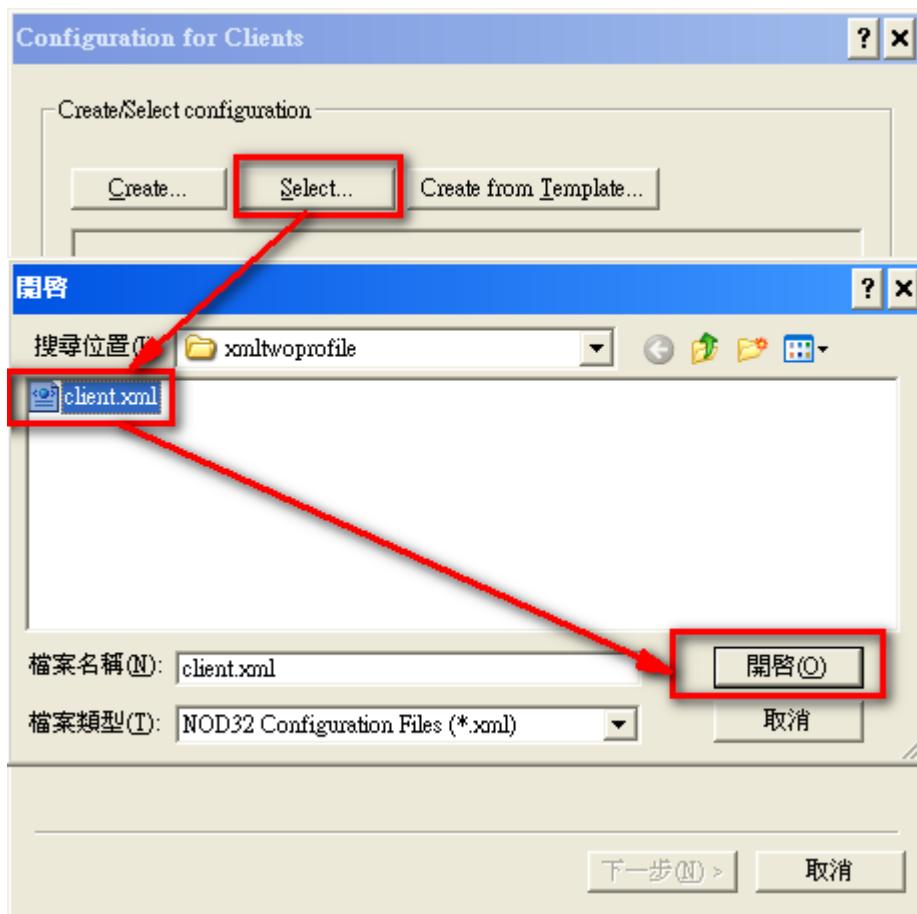


選擇要更新設定的客戶端

Choose the user who like to change the configuration next.

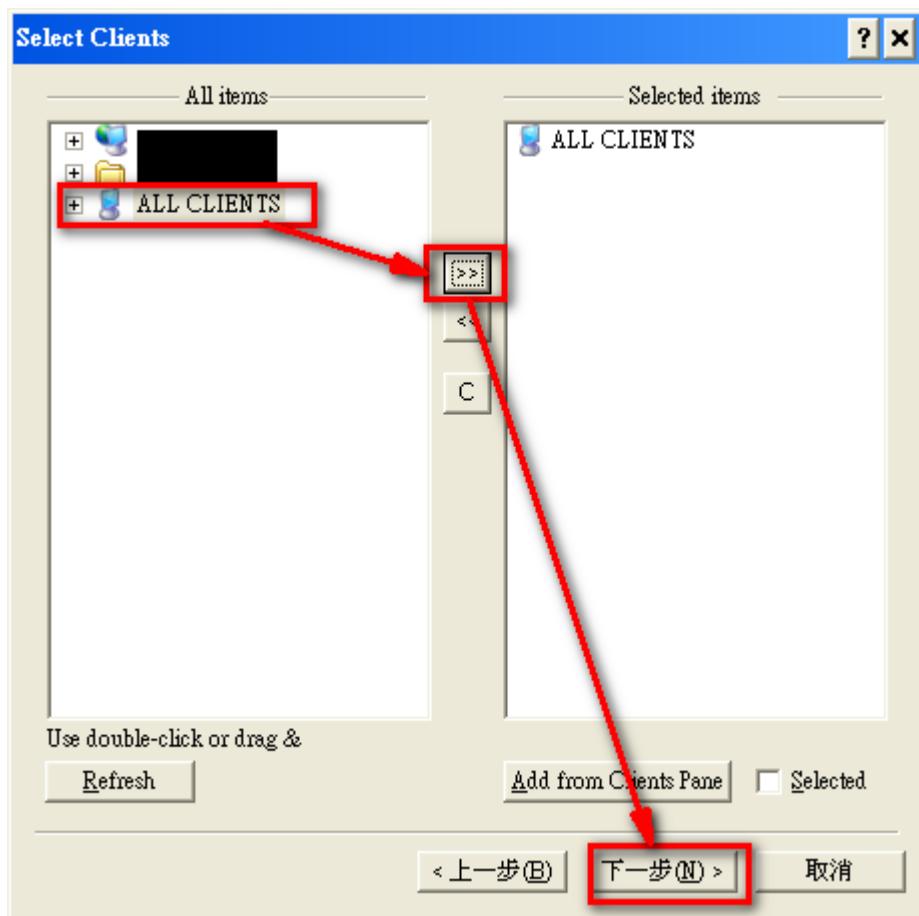

完成新增 Task

finish the new task

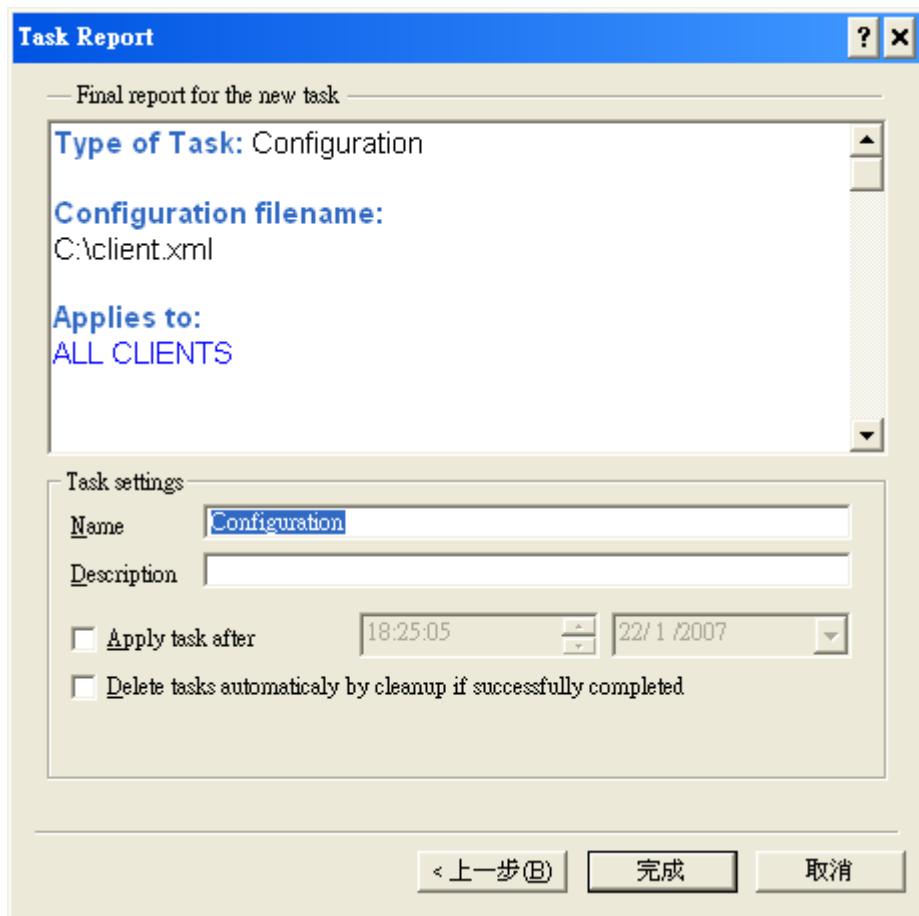


客戶端會自動更新設定檔

the client will auto update the profile.

要等五至十分鐘, 待所有客戶端與 RAS 連線及更新設定

after 5 – 10 minutes, when the client get the configuration task and update the RAS connection and update setting.

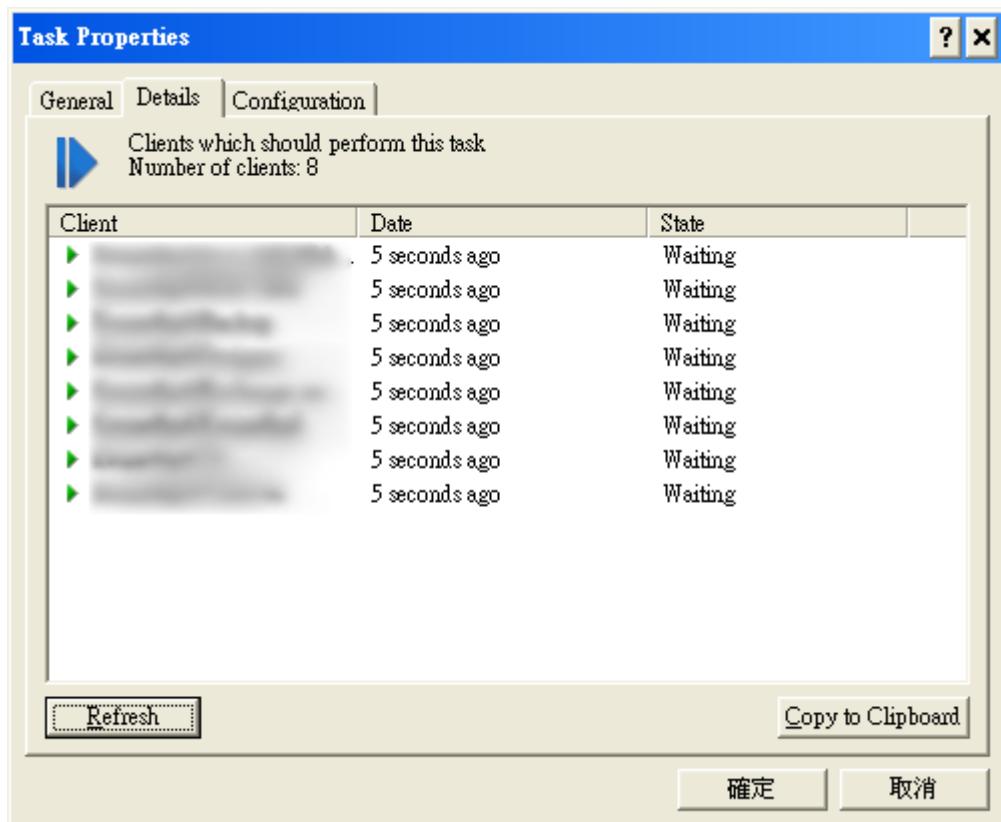

4. 完成後,可以在客戶端中看一看,計劃器/排程器是否有一個新的設定.

When finish the setting profile. you can check the setting of client, as like the fig.1

